




SUBMITTAL PACKAGE

Window package

Type 1 and Type 2 double-hung units

A4.3 window schedule | 12 units | shutters excluded

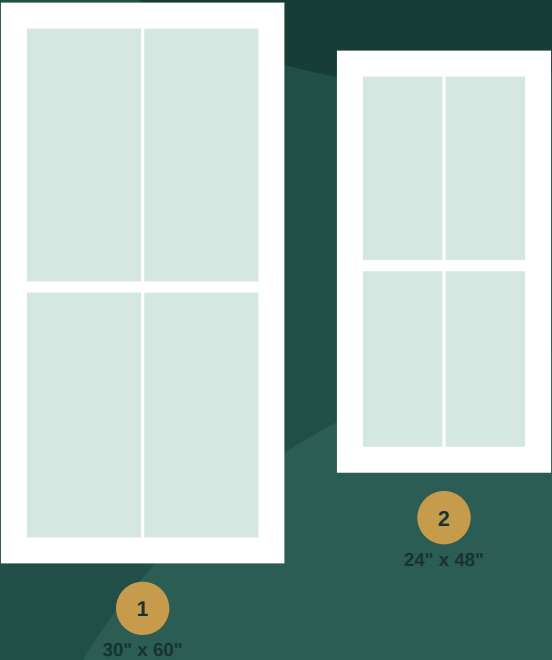

PROJECT
Virginia Farmhouse

PREPARED FOR
Ridgeway Residential Builders

SUPPLIER
Commonwealth Window & Millwork

PACKAGE
08 52 00 - Wood Windows

SUBMITTAL
CWM-08-5200-001 | REV 0

ISSUE DATE
September 2, 2026



PACKAGE CONTROL

Coordinated window schedule

Totals reconcile to the project plans. Configurations match A4.3.

12

TOTAL UNITS

7

TYPE 1

5

TYPE 2

2

WINDOW TYPES

MARK	QTY	UNIT SIZE	MATERIAL	OPERATION	LITE PATTERN	MAKE / MODEL
1	7	30" x 60"	Composite	Double hung	2/2 SDL	Marvin / Ultimate DH
2	5	24" x 48"	Composite	Double hung	2/2 SDL	Marvin / Ultimate DH
TOTAL	12	-	-	-	-	-

SCOPE INCLUDED

Twelve factory-assembled double-hung window units in the two scheduled sizes, with 2/2 simulated divided lites and insect screens. Verify field conditions before order release.

SCOPE EXCLUDED

Optional louvered shutters, shutter dogs, exterior 2x6 casing, subsills, 2x6 aprons, wall flashing, sealants, and interior trim are not part of this package.

DRAWING REFERENCES

A1.2

First Floor Plan

Quantity coordination

A1.3

Second Floor Plan

Quantity coordination

A4.3

Doors & Windows

Sizes, operation, 2/2 SDL, make/model



WINDOW TYPE 1

30" x 60" double-hung unit

Marvin Ultimate DH | Qty 7 | 2/2 simulated divided lites



1
30" x 60"

Elevation diagram is schematic. Do not scale for rough-opening dimensions.

SUBMITTED CONFIGURATION

MARK	QUANTITY	SIZE	OPERATION
1	7	30" x 60"	Double hung
MATERIAL	LITES	MAKE / MODEL	SCREEN
Composite	2/2 simulated divided lites	Marvin / Ultimate DH	Insect screen

PACKAGE QUANTITY

7 SCHEDULED UNITS

ARCHITECTURAL TRIM

Coordinate 2x6 exterior casing, subsill, and 2x6 apron shown on A4.3. These trim pieces are by others and are not included with the factory window unit.

ORDER RELEASE HOLD POINT

Verify each rough opening, wall thickness, sill condition, jamb depth, interior return, exterior trim depth, egress applicability, and final finish selections before fabrication.


COMPLIANCE: SIZE, QUANTITY, OPERATION, LITE PATTERN, MATERIAL, AND BASIS-OF-DESIGN MATCH A4.3.



WINDOW TYPE 2

24" x 48" double-hung unit

Marvin Ultimate DH | Qty 5 | 2/2 simulated divided lites

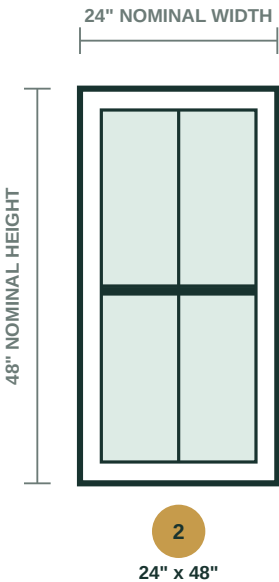

Elevation diagram is schematic. Do not scale for rough-opening dimensions.

SUBMITTED CONFIGURATION

MARK	QUANTITY	SIZE	OPERATION
2	5	24" x 48"	Double hung
MATERIAL	LITES	MAKE / MODEL	SCREEN
Composite	2/2 simulated divided lites	Marvin / Ultimate DH	Insect screen

PACKAGE QUANTITY

5 SCHEDULED UNITS

ARCHITECTURAL TRIM

Coordinate 2x6 exterior casing, subsill, and 2x6 apron shown on A4.3. These trim pieces are by others and are not included with the factory window unit.

ORDER RELEASE HOLD POINT

Verify each rough opening, wall thickness, sill condition, jamb depth, interior return, exterior trim depth, egress applicability, and final finish selections before fabrication.

COMPLIANCE: SIZE, QUANTITY, OPERATION, LITE PATTERN, MATERIAL, AND BASIS-OF-DESIGN MATCH A4.3.



PACKAGE SUMMARY

Coordination, installation, and closeout

Window-only package. No shutters are submitted.

REQUIREMENT	DRAWING BASIS	SUBMITTED	STATUS
Type 1 quantity	Coordinated plan count	7 total	MATCH
Type 2 quantity	Coordinated plan count	5 total	MATCH
Sizes	Type 1: 30" x 60" / Type 2: 24" x 48"	Same	MATCH
Operation	Double hung	Double hung	MATCH
Lite pattern	2/2 lites	2/2 simulated divided lites	MATCH
Make / model	Marvin / Ultimate DH	Marvin / Ultimate DH	MATCH
Optional shutters	Shown separately on A4.3	Excluded	N/A

INSTALLATION COORDINATION

Set units plumb, level, square, and within the manufacturer's published installation tolerances. Integrate sill pan and perimeter flashing with the wall weather barrier. Use compatible low-expansion foam and sealants. Protect factory finishes and glazing through closeout.

CLOSEOUT DELIVERABLES

Provide the approved window schedule, final order acknowledgment, installation instructions, care information, warranty documentation, and a record of approved substitutions or field changes. Record verified rough-opening dimensions before fabrication release.

SUBMITTAL REVIEW

Reviewed | Reviewed as noted | Revise and resubmit

Reviewer: _____

Date: _____